



# Tyfo® Blast-Flex EP System (Spray Elasto-Plastic Blast Protection)

**DESCRIPTION**


Tyfo® Blast-Flex is a urethane-urea base, two-component system. This high-tech system is spray-applied and cures as a rubber-like material. The material is used for blast and other protection systems.

Blast-Flex EP is unique having an open-weave glass, carbon or aramid fabric, which is laid on the element to be strengthened after the first Type I or Type III spray coat. The glass, carbon or aramid fabric adds to the strength to the system.

A variety of colors are available upon request.

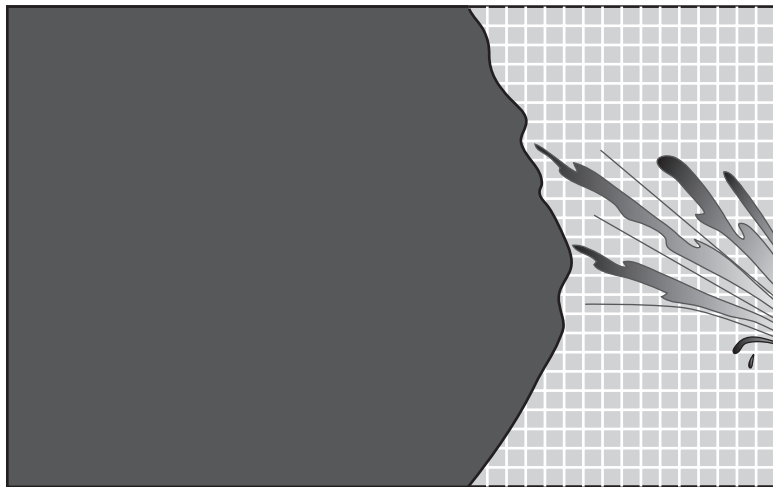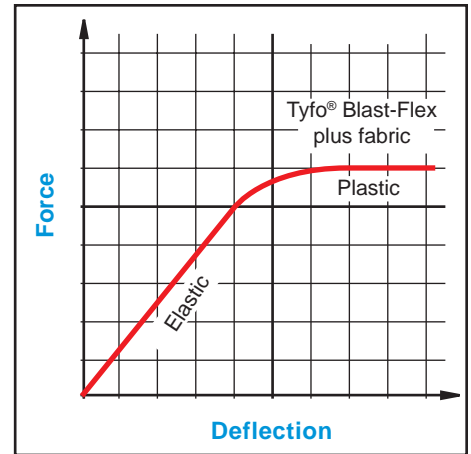

**Tyfo® Blast-Flex System**

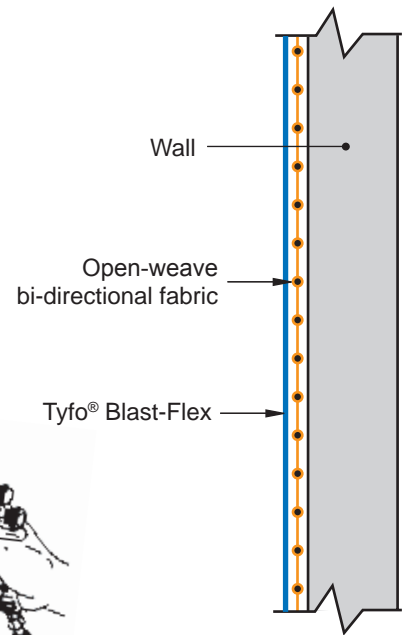

**Wall Section**

**Fyfe Co. LLC**  
 "The Fibrwrap® Company"  
 Nancy Ridge Technology Center  
 6310 Nancy Ridge Drive, Suite 103, San Diego, CA 92121  
 Tel: 858.642.0694 Fax: 858.642.0947  
 E-mail: [info@fyfeco.com](mailto:info@fyfeco.com) Web: <http://www.fyfeco.com>

**Statement of Responsibility:** The technical information and application advice in this publication is based on the present state of our best scientific and practical knowledge. As the nature of the information herein is general, no assumption can be made as to the product's suitability for a particular use or application, and no warranty as to its accuracy, reliability or completeness, either expressed or implied, is given other than those required by State legislation. The owner, his representative or the contractor is responsible for checking the suitability of products for their intended use. Field service, where provided, does not constitute supervisory responsibility. Suggestions made by the Fyfe Co., either verbally or in writing, may be followed, modified or rejected by the owner, engineer or contractor since they, and not the Fyfe Co., are responsible for carrying out procedure appropriate to a specific application.